


Required

| | | |
|--|---|--|
| Footbox with back and sides CS-FB | | |
| Footbox with back, no sides CS-FBNS | | |
| Foot plate no back, no sides CS-FP | | |
| Width | Height (back) | |
| Depth | Height (front) if blank, front will be made half height of the back | |

Optional

| | | |
|---|---|---|
| Instep straps* CS-IS | | |
| Toe straps* CS-TS | | |
| * Not possible to use foot straps with a beanbag | | |
| If straps required, give position of slots. C required only with CS-TS: | | |
| A | B | C |
| | | |
| Padded darterx inlay Velcros round all edges. CS-FBI | | |
| Bean bag support* 50mm thick. CS-FBBS | | |
| Non-slip surface CS-FBNSS | | |
| Footraise Left (state height) CS-FR-L | | |
| Footraise Right (state height) CS-FR-R | | |

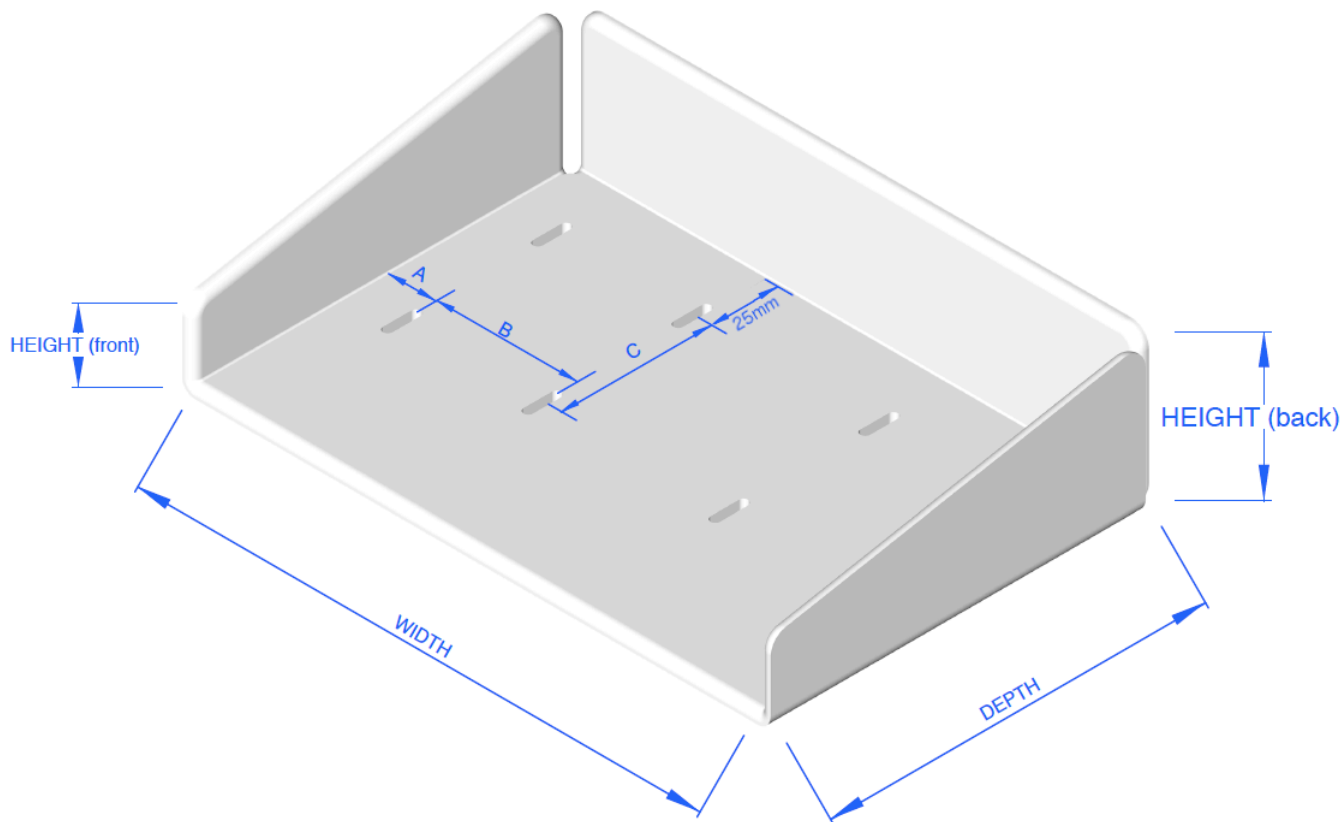

Wheelchair service

Delivery address

Contact name

Assessor's name

Client's name

Date

Official Purchase Order Number must be supplied with all orders.
PON:

Please complete assessment form in full. Failure to do so may result in errors.

Footboxes are supplied with fasteners for fitting direct to wheelchair footplates. 4x M6x20mm countersunk bolts, 4x washers, 4x M6 nyloc nuts.

Footbox dimensions are internal. External width is width +12mm. Ensure that external width will fit between footrest hangers or other necessary parts on the wheelchair.



Consolor Ltd, 188 – 194 Spring Road,
Bournemouth, Dorset, BH1 4PX
T: 01202 827650 E: admin@consolor.co.uk

FOOTBOX ASSESSMENT FORM

Material:
6mm Black PVC

DIMENSIONS IN MILLIMETRES
DEBUR AND BREAK SHARP EDGES

Issue no. 2
Oct. 2013
DWG No.
CS-FB